

FLEXI-DUCT SKYLIGHTS **by WOODROFFE**



**SKYLIGHT
INDUSTRY
ASSOCIATION**

**TESTED TO
AUSTRALIAN STANDARD
AS 4285**

FLEXI-DUCT SKYLIGHTS

The Woodroffe Flexi-Duct System incorporates the Woodroffe Budget-lite, Flexi-Duct Ducting, Ceiling Frame, Diffusers and adaptors to allow a simple but efficient method of installation.

The Flexi-Duct System allows maximum light to enhance even the darkest room. the flexible ducting is available in any length up to 3 metres. A sleeve can be added for longer lengths.

SIZES: 400 x 400 internal measurement
 400 x 750 internal measurement
 550 x 550 internal measurement
 550 x 750 internal measurement
 750 x 750 internal measurement

ROOF PROFILES: Tiled or Corrugated —
 Iron Roofs

VENTED AND UNVENTED

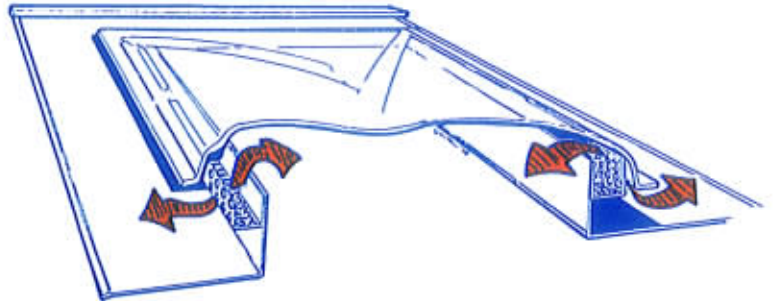


Diagram 1
 Showing ventilated area and air-flow movement.


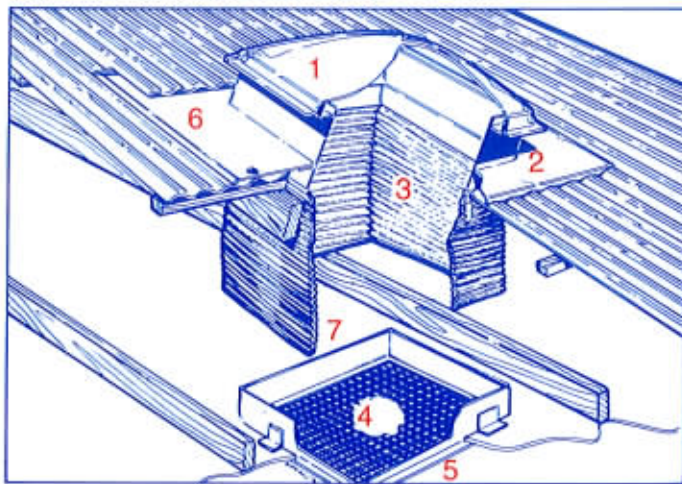


Diagram 2
 Detailed drawing showing complete Flexi-Duct System.

THE NEW TWIN SHAFT FLEXI-SHAFT!

Incorporating Woodroffe Conventional Skylights, you can now have natural light in two rooms with only one Woodroffe twin shaft.

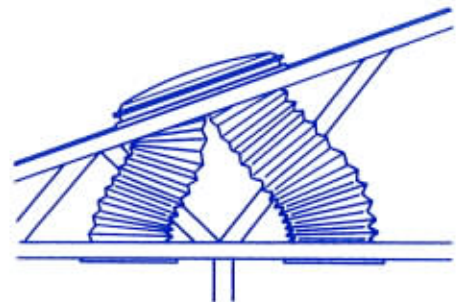

PARTS IDENTIFICATION

1. **ACRYLIC DOME** — available in opal only.
2. **METAL BASE** — manufactured from 0.6mm galvabond AS1397.
3. **FLEXIBLE DUCT** — Reflective ducting allows flexibility between roof timbers, ceiling joists, conduits and pipes.
4. **CEILING DIFFUSER** — K12 or K15 prismatic for unvented units or Glozell Diffusers (eggcrate) for vented units.
5. **PVC WHITE CEILING FRAME** — allows easy connection with ducting adaptor and provides an attractive ceiling trim.
6. **SOAKER TRAY** — guarantees weather proofing.
7. **DUCTING FLANGE** — connected to base allows installation of ducting at roof level.

WOODROFFE
 SKYLIGHTS

A.B.N. 83 095 846 709

59A LANGFORD STREET
 POORAKA SA 5095
 Telephone: (08) 8359 7300
 Fax: (08) 8359 6444



ALSO AVAILABLE FROM:

Q.I.S. / SOLARWISE
 22 MARBLE DRIVE
 KINGSTON Q 4114
 PH: (07) 3209 5466 FAX: (07) 3209 5822
 BSA Lic No. 722628